

PRODUCT SAFETY DATA SHEET


MkII PAINT GRENADE

FOR OUTDOOR USE ONLY BY PERSONS 18 YEARS OF AGE AND OVER

Description and Effect

Diameter:	75 ± 5mm	Effect:	Bang and Paint Scatter.
Length:	124 ± 5mm	Effect Duration:	Instant
Gross Weight:	165 ± 20g	Noise:	< 120 dB(A) _{I_{max}} @10m
Net Explosive Content (N.E.C):	0.5g	Safety Delay:	4 – 6 Seconds
		Safety Distance:	10 m

Instructions for Use

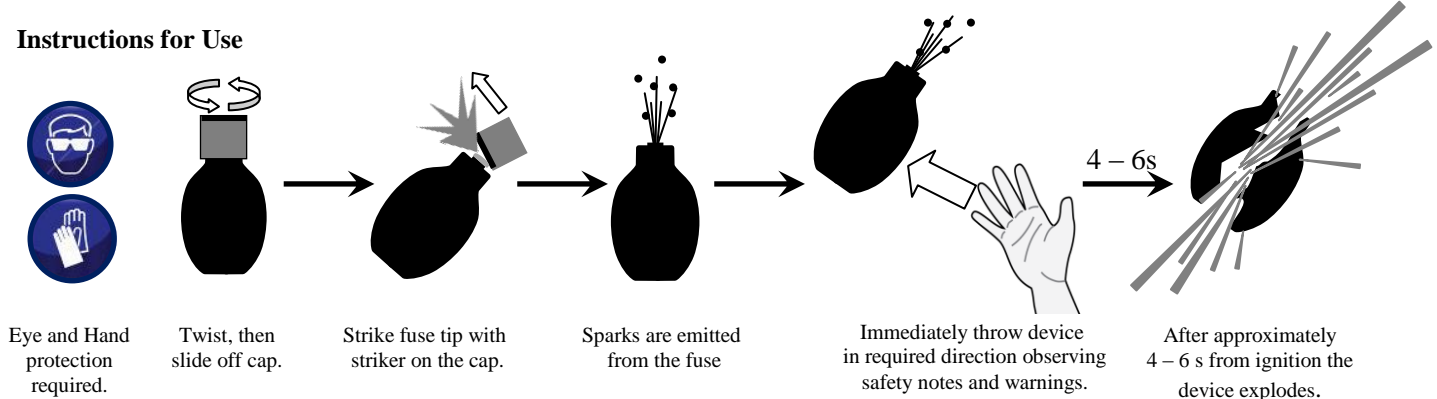

Safety:

- Pyrotechnic Article
- For persons of **18** years and over ONLY.
- Safety Distance = **10 m**
- Wear eye and hand protection
- Keep away from sources of heat, sparks and open flames
- **Do Not Use** near easily flammable material e.g. fuel, tinder dry foliage.
- **Ensure All** persons in the vicinity of use are wearing the correct protective gear.

Warnings:

- **Use Only** in recognised Airsoft, Paintball Arenas or authorized training facilities.
- **DO NOT** throw at animals.
- The manufacturer will not accept liability whatsoever where these pyrotechnics are misused or where the product has been tampered with and/or customised.
- Handle with Care, Do Not subject to grinding, shock or friction.
- Once ignited and deployed **Do Not** return to the device within 5 minutes.
- **Do Not Use** in Public or Sports Places without the proper authorisation.

Packing, Transport and Storage

Items per Outer Carton:	50	Proper shipping name:	Articles Pyrotechnic for technical purposes	
Carton Dimensions:	41x 41 x 30 cm	Hazard Class:	1.4	
Carton *NEC:	0.025 Kg	Compatibility Group:	S	
Carton Net Weight:	8.3 Kg	UN number:	0432	
Carton Gross Weight:	9.5 Kg	Packing Group:	II	
		Packing Instruction:	135	
Storage Classification:	Hazard Type 4	<i>Ship Only by courier registered to carry Class 1 Goods</i>		
Storage of > 5Kg NEC will require a storage registration or License.		DO NOT Send these items through the postal system.		
		DO NOT take these items on Aircraft or Ferries		

* This is the Net Explosive Content of outer shipping carton.

Regulatory Information

UK - Competent Authority Document No.
 CE Generic Type
 CE Category
 Registration Number

SVC4315502P
 Simulation Device
 P1
 0589-P1-0632



Warning
Fire or Projection Hazard

Misfire & Disposal

Misfire: Do not return to it or pick up for at least 5 minutes. Soak in a bucket of water to await disposal.

Disposal: Submerge in a bucket of water to allow the water to enter the product. Leave soaking outside in a secure area for a minimum of 48 hours. Dispose of the water waste and the solid waste(s) separately and in accordance with local, regional or national regulations.